

**BT**

# BENNE TERRASSEMENT

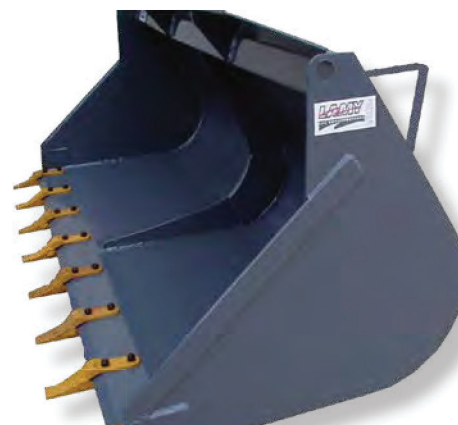
## Excavating bucket

Gamme renforcée - puissance de 100 à 140 cv

Reinforced range - power from 100 to 140 hp



avec dents  
With teeth

**CARACTERISTIQUES :**

- › Largeur : de 1,50m à 2,50m
- › Contenance : de 500 L à 1500 L
- › Lame d'attaque 150x20mm, dents boulonnées
- › Cerclage axial extérieur, nervure centrale intérieure
- › Rehausse supérieure rapportée, renforcée sur toute la largeur
- › Jous latérales avec renforts sur flancs
- › Avec dents boulonnées (ou contre-lame boulonnée)

**CHARACTERISTICS:**

- › Width: from 1,50m to 2,50m
- › Capacity: from 500 L to 1500 L
- › Toe plate 150x20mm, bolted teeth
- › External axial strapping, internal central rib
- › Top extension attached, reinforced over the entire width
- › Folded over the entire width of the body
- › With bolted teeth (or bolted counter plate)

**OPTIONS:**

- › Kit de porte-dents soudés
- › Kit de contre-lame réversible 150x20
- › Jous droites
- › Supplément pour accrochages sur axes

**OPTIONS:**

- › Welded tooth holder kit
- › Reversible counter plate kit 150x20
- › Straight side plates
- › Supplement for pin on connection

Barcode	Width	Height	Depth	Length	Capacity (L)	Capacity (L)	Weight (Kg)
BT 18/08	974mm	954mm	849mm	1,80m	690 L	860 L	360Kg
BT 20/06	974mm	954mm	849mm	2,00m	760 L	960 L	390Kg
BT 22/10	1 073mm	1 014mm	969mm	2,20m	1 000 L	1 200 L	450Kg
BT 23/08	974mm	954mm	849mm	2,30m	880 L	1 120 L	440Kg
BT 23/15	1 170mm	1 089mm	1 059mm	2,30m	1 250 L	1 570 L	500Kg
BT 24,5/10	1 073mm	1 014mm	969mm	2,45m	1 100 L	1 400 L	590Kg
BT 25/15	1 170mm	1 089mm	1 059mm	2,50m	1 360 L	1 700 L	540Kg

Votre concessionnaire :

