

**BMF.A**

# BENNE MULTIFONCTION


## SÉRIE A

### Grapple bucket A series

Pour gros chargeurs frontaux et télescopiques jusqu'à 3.5T de charge - puissance de 80 à 120 cv

For large front-end and telescopic loaders up to 3.5 T load - power from 80 to 120 hp

Vérins sur le dessus

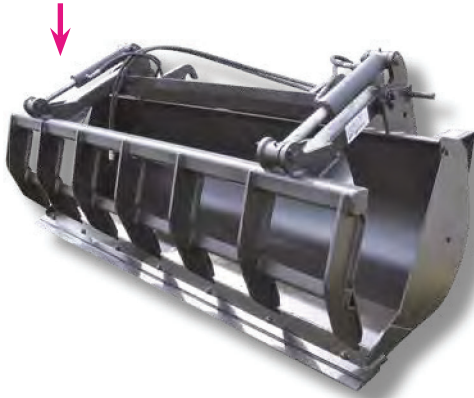

Avec Grappin dents soudées (GRL.A)

Avec mâchoire de désilage doigts courbés électroforgés (MRK. DA)

#### CARACTERISTIQUES :

- Largeur : de 1,85m à 2,45m
- Fond légèrement bombé avec pli rigidifieur sur la largeur
- Épaisseur 10mm
- Axes 35mm avec graisseurs et bagues d'usure
- Grappins au choix réglables 2 positions, avec 2 vérins double-effet 70 x 40mm
- Grappin dents plates soudées avec renforts - GRL.A
- Mâchoire doigts courbés électroforgés lg 680mm (DEC 680) - MRK.A (7 doigts)
- Mâchoire doigts courbés électroforgés de désilage - MRK.D.A (12 doigts)

#### CHARACTERISTICS:

- Width: from 1,85m to 2,45m
- Slightly domed bottom with stiff fold on the width
- Thickness 10 mm
- 35 mm axes with grease fittings and wear rings
- 2-position adjustable grapples with double-acting cylinders 70 x 40mm
- Welded flat-tooth grapple with reinforcements - GRL.A
- Electroformed curved finger jaw lg 680mm (DEC 680) - MRK.A (7 fingers)
- Jaw curved fingers electroformed for unsilage - MRK.D. A (12 fingers)

#### INCLUS :

- Kit de contre-lame boulonnée
- Jous boulonnées

#### INCLUDED:

- Bolted counter-plate kit
- Bolted side plates

#### OPTIONS:

- Contre-lame boulonnée réversible

#### OPTIONS:

- Reversible bolted counter plate

Code	← →	Contenance Grappin Fermé Closed Grapple Capacity	GRAPPIN GRL. A	MÂCHOIRE MRK. A	MÂCHOIRE MRK. DA
			KG	KG	KG
BMF. A 18,5	1,85m	0,90 m <sup>3</sup>	530Kg	510 Kg	530kg
BMF. A 21	2,10m	1,00m <sup>3</sup>	570Kg	630Kg	600kg
BMF. A 23	2,30m	1,10m <sup>3</sup>	620kg	700kg	610kg
BMF. A 24,5	2,45m	1,20m <sup>3</sup>	650kg	730kg	650kg

Votre concessionnaire :

